

Unit: mm

Item No.	L	W	H
RPS-AW3/P9F	81	15	6

### Features

- Each module adopt high quality SMD5050 LED, with wide beam Angle, high brightness, pure colour.
- Fixed chips' wavelength, the batches have the unique color temperature, reduced customer inventory;
- Unique circuit design ensured the stability, PCB use FR4 epoxy resin, glass fiber wiki plate, ensured the performance of good cooling, anti-static, anti-aging, etc;
- Input voltage: DC12V;
- IP level: IP65.


### Application

- Billboards, blister word, flat word;
- Fine words, large advertising logo;
- Various models light box of high-grade entertainment club;
- Hotel buildings, indoor decorate adornment

### Parameters

Item No.	PCB	Wattage	Voltage	LEDS/m	Lumen Output/m	View Angle	IP Rate	Warranty	Working environment	Package
RPS-AW3/P9F	FR-4	0.7W	DC12V	3pcs 5050	57.94lm	120°	Ip65	2years	-20~+65°C	550g/bag

### Connection

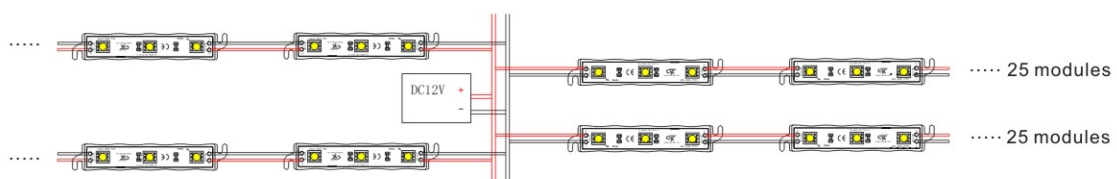

Note: every 50 PCS sets for the primary circuit, more than 50 PCS sets should be connected to the main line.